# Wayside Signal by Unipart Dorman

Modernize your Wayside Signal assets with an LED Signal, backed by an unrivaled industry track record.





# **Way Ahead in Signaling**


Patent Pending. Covered by U.S. Patent Publication No. US 2019-0077428


#### Best in Class

Unipart Dorman's Wayside - SearchLITE signal series have been developed with close industry collaboration to provide a unique solution. The LED light sources deliver innovation with universal value, provide a long and predictable life, giving huge benefits to railroad operators.

The reliability of the Wayside series is based upon design excellence developed over 30 years of supplying LED Signals into the UK railway sector where Unipart Dorman have installed over 100,000 signals, delivered unprecedented reliability with over 40 million fault free operational hours, acheived measurable operating field life performance of 13yrs+ (and still going strong), attained a 3rd party certified zero maintenance LED signaling soution, and command a

- 95% market share of every LED signal type on the network.
- Unipart Dorman track record incorporated into AREMA compliant design
- Slim Profile Retrofits into all existing signal housings, exact same foot print as ColorLITE
- AREMA+ thermal shock tested to replicate and exceed real field temperature extreme variations
- Multiple Interlocking compatibility, cold and hot proving with patented 5/16 light out technology
- Cost Reduction in current Asset Operation and Maintenance through enhanced reliability over extended life



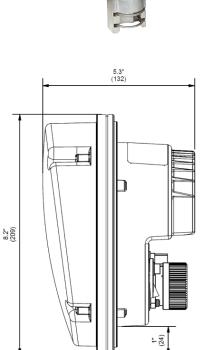





### Technical Data

Technical Data	Compliance		
Nominal supply voltage	12VDC		
Supply voltage range	8.0-16.0V		
Nominal current @ 12v	Greater than 1100mA		
Storage temperature	-67°F to +185°F / -55°C to +85°C		
Operating temperature	-40°F to +158°F / -40°C to +70°C		
Vibration	AREMA 11.5.1 D4 Class B		
Shock	AREMA 11.5.1 D5 Class B		
Ingress	NEMA 250-1991 Enclosure 4 - EN60529 IP65		
EMI	AREMA 11.5.1 D6		
Dielectric strength	AREMA 11.5.1 D7 Class B		
Colours	AREMA 7.1.10		
Luminous intensity Long Range (5000ft)	LED Signal Module Purchase Specification		
Luminous intensity Medium Range (2000ft)	LED Signal Module Purchase Specification		
Hot Filament Test	AREMA 7.1.5 BI		
Cold Filament Test	AREMA 7.1.5 B2		
Light Out Detection	AREMA 7.1.5 B3		
Outer Lens Construction	High Impact Polycarbonate front cover with external UV resistant hard coating to reduce scratching during cleaning operations. Medium Range signals are fitted with a tinted cover.		
Rear Housing Construction	Aluminum casting incorporating heatsink, pressure vent and sealed connections, allowing for greater internal environmental control, which in turn prolongs the operational life of signal		
Dimensions	Dia 8.2'' (209mm) Depth 5.3'' (132mm)		
Weight	4.5lbs/2kg		
Electrical Interface	43"/1092mm freewire leads terminated with 1/4"/M6 ring terminals or Mil 5015 standard plug coupler		

# Model / Product coding

Wayside Series	Module Options	Long Range UD Part No	Medium Range UD Part No
SearchLITE	Tri-Colour RYG, I2v, Pulse Proved, Standard outer cover, Plug Coupled Connection	WSSL/RYG/3P1/AP	WSSM/RYG/3P1/BP
SearchLITE	Tri-Colour RYG, I2v, Pulse Proved, Standard outer cover, Free Wired Connection	wssl/ryg/3pi/af	WSSM/RYG/3P1/BF

Patent Pending. Covered by U.S. Patent Publication No. US 2019-0077428



# Operation

The Wayside - SearchLITE Series are fully compliant with AREMA C&S requirements and have been mechanically fit tested to a wide variety of incumbent Colorlight and Searchlight signal housings.

The Wayside - SearchLITE series is equipped with a Mil 5015 standard plug coupler to allow plug and play connection with local AAR terminals in the head. (Please note: plug and lead supplied in various lengths as separate accessory)

The Wayside -SearchLITE Series are designed to to be compatible with all interlocking controllers and does not require any software or circuit design modification to install.

The units are capable of interfacing to systems that have both Hot and Cold Filament Tests and also Light Out detection.

The unit has been successfully tested already on the following 12v interlocking systems:

- AC Relay
- AC Relay with DC bias
- EC4
- iLOK
- MicroLOK 2
- VHLC
- ElectrologIXS
- GEO

Please refer to user guide for full installation instructions.



# **About Unipart**

The Unipart Group is a leading UK manufacturer, full service logistics provider and consultant in operational excellence. Operating across a range of market sectors, including automotive, manufacturing, mobile telecoms, rail, retail and technology, Unipart offers a breadth of services to a wide range of blue chip clients internationally.

# Contact us:



Wennington Road Southport Merseyside PR9 7TN UK

T: +44 (0) 1704 518000

E: dorman.enquiries@unipartdorman.co.uk



173 Main Street Bath Ontario K0H 1G0 Canada

T:+1 (0) 61 335 23 458

E: dorman.enquiries@unipartdorman.com



Westcode Inc 223 Wilmington -West Chester Pike Suite 105, Chadds Ford PA 19317 T:+1 (0) 610 738 1200 E: sales@westcodeus.com

173 Main Street, Bath Ontario, K0H 1G0 Canada T: +1 (0) 61 335 23 458 email: dorman.enquiries@unipartdorman.com